



OTSEN REMO LINEAR LIGHT

OTSEN Linear Light is a high-performance luminaire made of extruded aluminum with a fine matte powder-coated finish, suitable for ceiling mounting or suspension. It offers direct light emission with SMD LEDs delivering 110 lm/W, equipped with advanced LED boards with a MacAdam color tolerance of ≤ 3 . The luminaire is available in lengths ranging from 13 cm to 450 cm, with CRI options of 90+ and four optical diffusers (15°, 30°, 45°, or 60°). Drivers are available in ON/OFF or dimmable versions (DALI, Push Button, or 1-10V). Available in white, black, or grey finishes, the luminaire features L80 chip performance at 50,000 hours, flicker free and UGR <math><16</math> for glare control.

Application Areas

- Office space
- Retail Store
- Healthcare Facilities
- Residential Project
- Hotels

LIFUD
LED Driver

OSRAM
CHIP



Product Features

- Streamline design style
- No Flicker, High efficiency and energy saving
- Different dimming modes for option: 0-10V, DALI & TRIAC
- Length can be Customizable and Configurable
- High CRI
- Easy Installation and Maintenance
- Long lifespan of 35,000 hours, ensuring reliable performance.
- IP44 rated for outdoor use, with a 3-year warranty for added durability.

Product & Information


Luminaire Details	Product Name	OTSEN-REMO LINEAR LIGHT
	Product Type	LINEAR LIGHT GRILL TYPE
	Product code	OT-RLB-8033
	Luminaire Type	SMD
	IP Rating	IP44
	Supply Voltage	220-240V
	Power W	20W, 30W, 40W, 48W & 60W
	Optics	15°, 35°, 45°, 60°
	Available CCT	CCT Changable 3000K, 4000K, 6000K
	CRI	>90
	Material	Aluminium
	Storage Temperature (Ts)	-40°C to 60°C
Lifetime	35000 Hrs	

Product Detail


Item No.	Size	Power	PF/CRI	CCT	B.Angle
OT-RLB-8033-06M	600x80x33mm	10W,15W,20W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°
OT-RLB-8033-10M	1000x80x33mm	15W,20W,25W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°
OT-RLB-8033-12M	1200x80x33mm	15W,20W,25W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°
OT-RLB-8033-15M	1500x80x33mm	20W,25W, 30W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°
OT-RLB-8033-20M	2000x80x33mm	35W,40W,50W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°
OT-RLB-8033-30M	3000x80x33mm	45W,60W,80W	0.9/>90	2700-6500K	15°, 35°, 45°, 60°




Product Structural Design




Availbale Size : 600mm, 1000mm, 1200mm, 1500mm, 2000mm, 3000mm

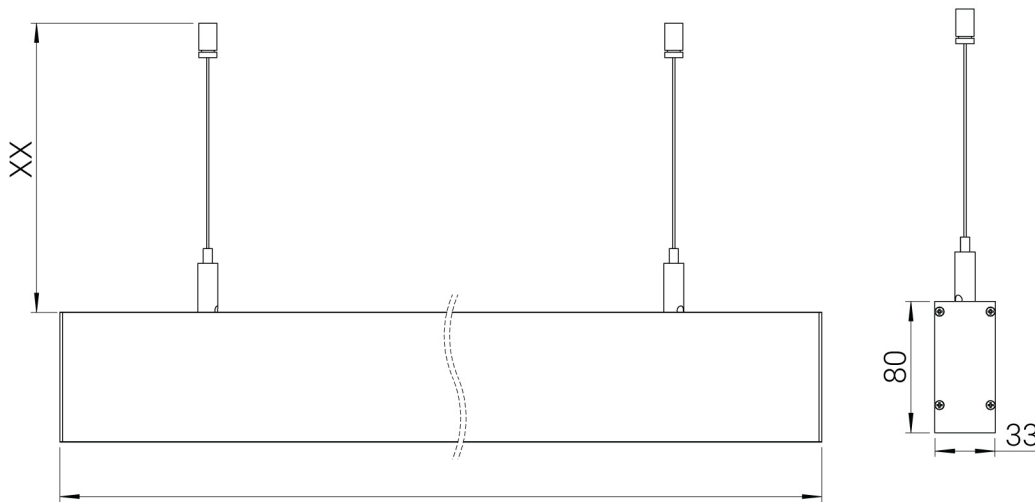


Mounting Type



Suspension
style



Surface
Mounted

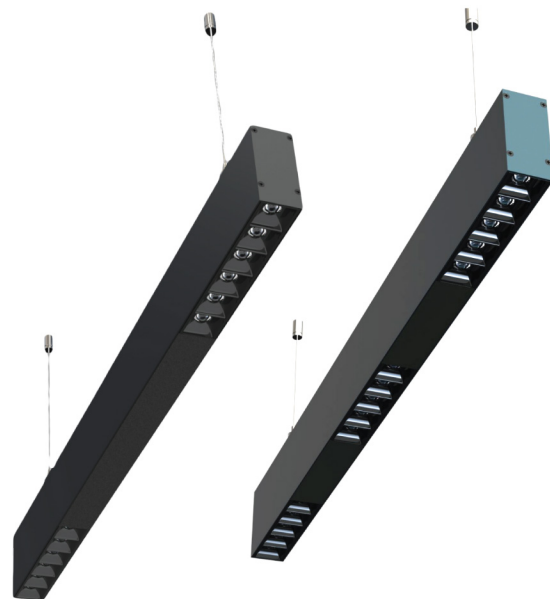



© 2023 OTSEN UK PVT. LTD. all rights reserved. OTSEN reserves the right to make changes in specifications and / or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.otsen.co.uk